


## 磁吸标签



### 一、技术参数

|          |                                                     |
|----------|-----------------------------------------------------|
| 产品型号     | UAD1710/ H1AD1710/ H2AD1710/ H3AD1710               |
| RFID 协议: | EPC Class 1 Gen 2; ISO18000-6C/<br>NFC/14443A/15693 |
| 频率:      | (美标) 902-928MHz, (欧标) 865-868MHz                    |
| 芯片:      | NTAG 213(支持定制, 高频、超高频)                              |
| 存储:      | 用户区: 512Bits EPC:96its TID:48Bits                   |
| 写入次数:    | 100,000 次                                           |
| 功能:      | 读写                                                  |
| 数据保存:    | 50 年                                                |
| 读写距离     | 0-8 厘米                                              |
| 应用环境     | 含铁金属环境                                              |
| 尺寸:      | φ17*10 毫米                                           |
| 材料:      | PVC                                                 |
| 颜色:      | 双色                                                  |
| 安装方式:    | 磁吸                                                  |
| IP 等级:   | IP67                                                |
| 储存温度:    | -20°C—80°C                                          |
| 工作温度:    | -10° C—60° C                                        |

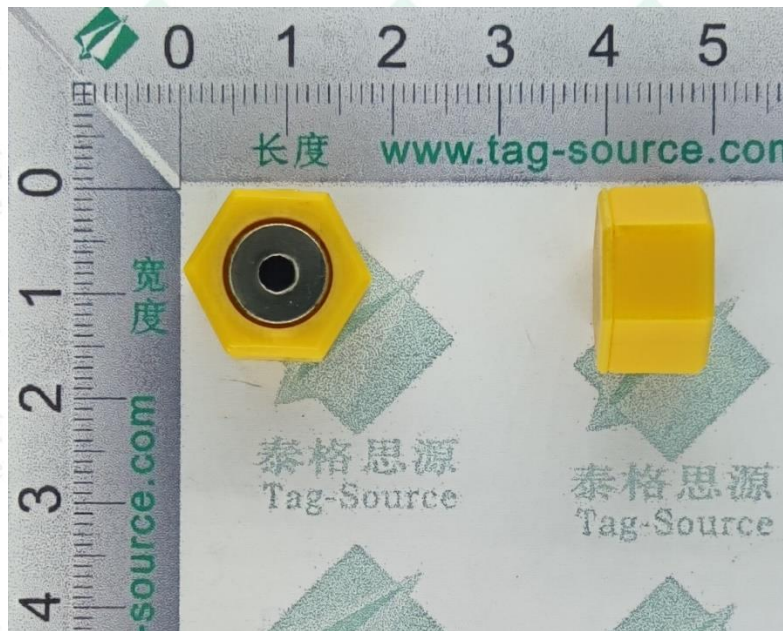

## 二、 结构示意

